



SLE-L-8.7-RGBW-24

Slim Line Encapsulated LED Bar
with or without Mounting Clips

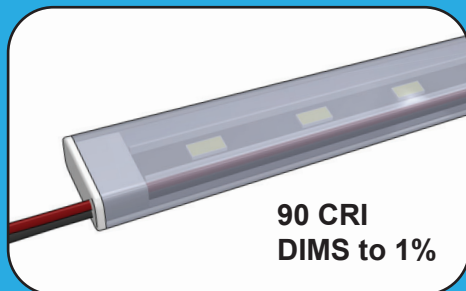

**90 CRI
DIMS to 1%**

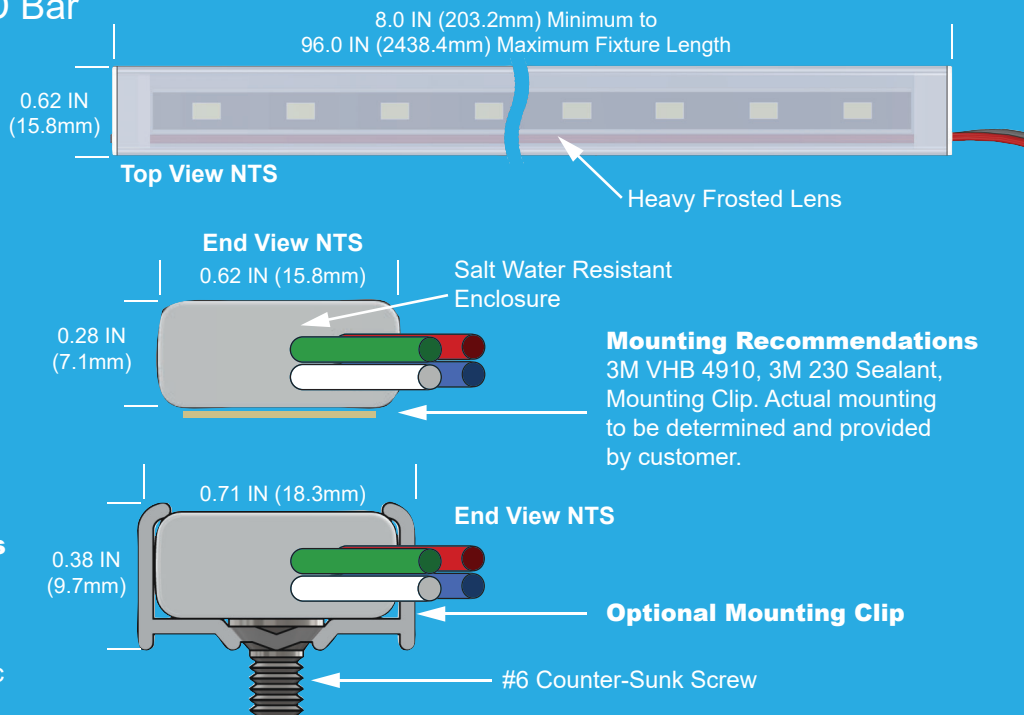

Secondary Wiring Requirements

Windy City Wire Part 007960 or equivalent. Maximum lead distance up to 100 FT from power supply to first LED fixture with Innovative Lighting, Inc Driver. Consult factory for longer leads.

Product Features

Color Rendering Index: 90

Circuit Type: Constant Voltage, Class 2 Power Unit Only

24V - Cuttable at 4.0 IN increments (0, 4, 8, 12...)

Maximum Power Consumption: 8.7 Watts per foot (28.5 per meter)

Beam Angle: 120°

Operating Temperature Range: -4°F to 122°F (-20°C to 50°C)

Dimming: Consistently to 1% with Innovative Lighting, Inc LED Drivers (See LED Driver Information Sheet)

Encapsulation Material: Heat and Flame-Resistant Polycarbonate

Lens Color: Heavy Frosted

Color Temperatures:


Lumen Output per FT:

Lumen Output per M:

IES File Number:

RGB	3000K	3500K	4000K	
	310	319	328	
	1017.0	1046.58	1075.84	

IC Based Constant Current Regulator with Temperature Compensation Circuits, Lengths from 8.0 IN to 96.0 IN (203.2mm to 2438.4mm), Patent-Licensed LEDs, Total Quality-Controlled Manufacturing Process, Three-Stage Binning System, Suitable for Wet Locations - Use Only with Class 2 Power Unit, Suitable for Cove Lighting, Suitable for Installation in the Storage Area of Clothes Closet, Suitable for Cabinet or Under Cabinet Use



INNOVATIVE
Lighting
DALLAS

Telephone (972) 721-1177
Innovative-Lighting.com
2324 Hinton Drive, Irving, TX 75061

Published 2020-OCT 02